




TECHNICAL DATA SHEET



Henkel Corporation
Professional and Consumer Adhesives
Rocky Hills, CT 06067
Phone 1-800-624-7767
Fax (440) 250-7863
www.henkel.com www.loctiteproducts.com

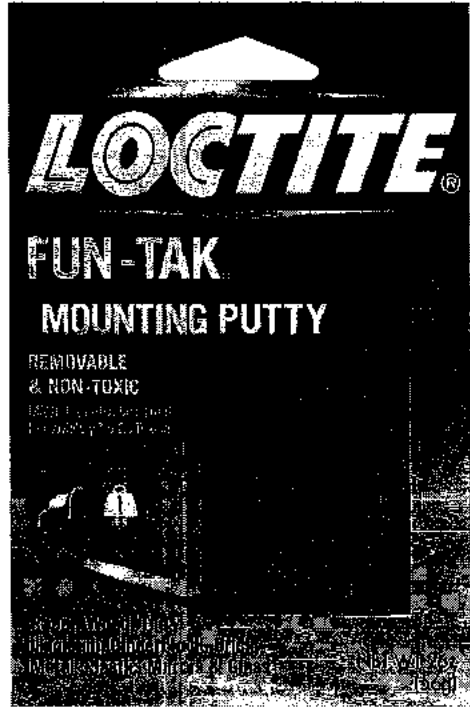

DESCRIPTION:

Loctite® Fun-Tak® Mounting Putty is a reusable, removable adhesive that is a convenient alternative for tape, tacks, staples and magnets in the home, school and office. No more holes in walls or chipped, peeled paint. Ideal for hanging any lightweight item to a smooth or hard surface. Loctite® Fun-Tak® Mounting Putty is unaffected by moisture and will not dry out. For interior use only.

RECOMMENDED FOR:

- Bonding items to most smooth surfaces, including blackboards, wood, plaster, brick, glass, tile metal, Formica, porcelain, linoleum and concrete.
- Hanging children's artwork on the refrigerator, stick memos to the phone, stick recipes, party decorations and greeting cards to the wall.
- Stopping vibrations of rattling windows, secure candlesticks, paper tablecloths, shelf paper and drawer linings, secure desk blotters and accessories.

NOT RECOMMENDED FOR:

- Hanging heavy objects, such as mirrors and framed pictures
- Sticking items to flocked or paper wall coverings, or newly painted surfaces
- Mounting costly artwork and posters
- Exterior applications

FEATURES & BENEFITS:

Feature	Benefits
Non-toxic.....	Safe for children
Re-usable.....	Minimize waste
Removable.....	Excellent for temporary mounting
Eliminates producing holes in walls.....	Eliminates wall repair
Will not dry out.....	Long-lasting

Item #	Package	Size
1087306	Carded Blister	2 oz

DIRECTIONS:

Preparation:
Surfaces must be clean and dry.

Application:
Tear off enough Loctite® Mounting Putty for the job, and knead the putty into a soft ball. Place small amount between the surfaces to be fastened and press. May leave oily stain on some papers and flat painted surfaces. Test in an inconspicuous area for 24 hours if uncertain. To remove gently peel away items from mounting surface.

Clean-up:
To remove any excess putty residue, roll additional mounting putty over the surface to pick up any remaining particles. Dry cleaning fluid may assist removal of oily stains.

STORAGE AND DISPOSAL

Not damaged by freezing. Dispose of unwanted putty with trash.

LABEL PRECAUTIONS

Children under 6 years of age should be supervised.

Refer to the Material Safety Data Sheet (MSDS) for further information

DISCLAIMER

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Purchasers should test the products to determine acceptable quality and suitability for their own intended use. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

TECHNICAL DATA

Typical Physical Properties		Typical Application Properties	
<u>Color:</u>	Blue	<u>Odor:</u>	Minimal
<u>Appearance:</u>	Putty	<u>Specifications:</u>	Conforms to ASTM D4236
<u>Base:</u>	Synthetic rubber	<u>Application Temperature:</u>	For best performance use at room temperature

Distributed by:
Rudolph Bros. & Co.
6550 Oley Speaks Way
Canal Winchester, OH 43110
Phone: 614-833-0707
Fax: 800-600-9508
e-mail: rbcsupport@rudbro.com
www.rudbro.com