




# TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

## DAP® Quick Plug® Hydraulic & Anchoring Cement

### PRODUCT DESCRIPTION

DAP® Quick Plug® Hydraulic & Anchoring Cement is a versatile, high-performance patching compound, formulated to stop running water through deep cracks, holes & imperfections in concrete surfaces. When used properly, it creates a watertight seal in just 3 to 5 minutes. DAP® Quick Plug® works both above & below grade. It can also be used to anchor machinery & other fixtures into masonry and concrete surfaces.

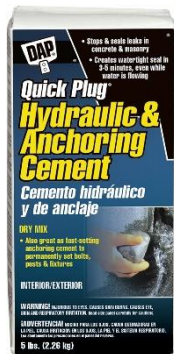

PACKAGING	COLOR	UPC
2.5 lb.	Grey	7079814084
5 lb.	Grey	7079814086
10 lb.	Grey	7079814090

### KEY FEATURES & BENEFITS

- Stops & seals leaks in concrete & masonry
- Repairs cracks and breaks in concrete & masonry
- Creates a watertight seal in 3-5 minutes, even while water is flowing
- Great as a fast-setting anchoring cement to permanently set bolts, posts & fixtures

### SUGGESTED USES

Ideal for filling holes, cracks, dents and defects on: Concrete and Masonry

### FOR BEST RESULTS

- Always use clean & cold water. Apply to damp surface from the top of the opening down.
- Keep patched area damp for several hours after application.
- Do not use mixture after it has begun to set.



# TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

**TOOLS NEEDED:** Clean mixing container, stirring stick, chisel, hammer, broad putty knife or trowel, wire brush, rubber gloves.

## APPLICATION

### WHEN USING AS HYDRAULIC CEMENT:

- 1. SURFACE PREPARATION:** Chisel holes to enlarge them by at least ¼", forming an inverted "V". Remove any loose or chipped concrete, brush clean. Make sure that the surface to be patched is damp. The surface can be prepared even while water is flowing from area to be patched.
- 2. MIXING INSTRUCTIONS:** Add Quick Plug® to clear water in a clean container, mixing 3 parts powders to 1-part water by volume. Stir mixture until it reaches putty-like paste. Desired consistency should be that of thick, ready-mixed concrete. Mixture will begin to set in 3 to 5 minutes so only mix as much material as you can use in this time.
- 3. APPLICATION:** Hold compound in gloved hand until it becomes warm. Force it firmly into hole & continue pressing it in place for 3-5 minutes. After 45 minutes, scrape or brush away excess cement for a smooth finish. For inactive leaks, dampen area to be patched. Using a trowel, fill area to be repaired completely with Quick Plug®, then level it to the surrounding surface.

### WHEN USING AS ANCHORING CEMENT:

- 1. SURFACE PREPARATION:** Chisel or drill out a hole 2" deep or greater into surface. Be sure hole is large enough to allow cement to flow easily around object. Remove any loose particles & dampen the surface.
- 2. MIXING INSTRUCTIONS:** Add Quick Plug® to clear water in a clean container, mixing 3 parts powders to 1-part water by volume. Stir mixture. A pourable consistency is desirable. Mix only enough to do the job at hand, as anchoring cement will begin to set in 3 to 5 minutes.
- 3. APPLICATION:** Set the item being anchored into the chiseled/drilled-out opening & pour anchoring cement around it. Level with the surrounding surface. Hold in place for 5 minutes until material begins to stiffen. Trim or brush away excess material. For vertical surfaces, fill hole with product & press item to be anchored into place. Smooth out excess material.

## TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Work Time	3-5 minutes
Set Time	Approximately 5 minutes
Full Cure Time	Approximately 28 days



# TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

Paintable

Yes, after full cure has been achieved.

## CLEAN UP & STORAGE

Wash skin and hands with soap and water. Wash tools immediately with water. Cured materials must be scraped away. Close container tightly.

## SAFETY

See product label or Safety Data Sheet (SDS) for health and safety information. You can request an SDS sheet by calling 888-DAP-TIPS or by visiting our website at [dap.com](http://dap.com)

## WARRANTY

**Limited Warranty:**

If product fails to perform as directed, within one year from the date of purchase, call 888-DAP-TIPS, with your sales receipt and product container available, for replacement product or sales price refund. DAP Products Inc. will not be responsible for incidental or consequential damages.

## COMPANY IDENTIFICATION

**Manufacturer:** DAP Products Inc., 2400 Boston Street, Baltimore, Maryland 21224

**Usage Information:** Call **888-DAP-TIPS** or visit [dap.com](http://dap.com) & click on "Ask the Expert"

**Order Information:** 800-327-3339 or [orders@dap.com](mailto:orders@dap.com)

**Fax Number:** 410-558-1068

**Also, visit the DAP website at [dap.com](http://dap.com)**